


# Rigging

## Rigging Requirements

Aerial Champagne pouring requires a minimum height of 3m. It works best with a rigging point of 5m. The rigging point should be in the form of a hook or beam or trussing that has been rated to at least 300Kg safe working load.

It is important to note we require space above beams to put the sling over. We are not qualified to fit I-beam clamps.

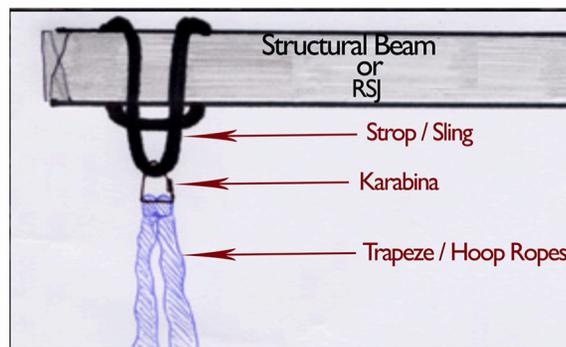

We will need the client to provide us with access to the ceiling by ladder, scissor lift (along with a certified operator) or similar for load-in and load-out. Access to the rigging point will be required both before the performance.

If you are unable to provide access to the rigging point, a professional rigger will be required.

If you are having more than one aerial bartender performing at the same time, you will require as many rigging points as performers.

## Aerial Rig

If you are not able to supply a rigging point, we are able to supply a freestanding aerial rig. It can stand at 3 different heights. This act works best with the full height, however is possible at the lowest.

## Dimensions

|                 | Option 1     | Option 2           | Option 3     |
|-----------------|--------------|--------------------|--------------|
| Height          | 4m           | 4.6m               | 7m           |
| Floor Footprint | 4m x 4m x 4m | 4.6m x 4.6m x 4.6m | 7m x 7m x 7m |

